

# Product Data Sheet

DIN 41612 IDC, type C,  
Part No. 104-49054





Illustration similar



Cable-to-Board

- 64 contacts
- IDC
- performance level 2

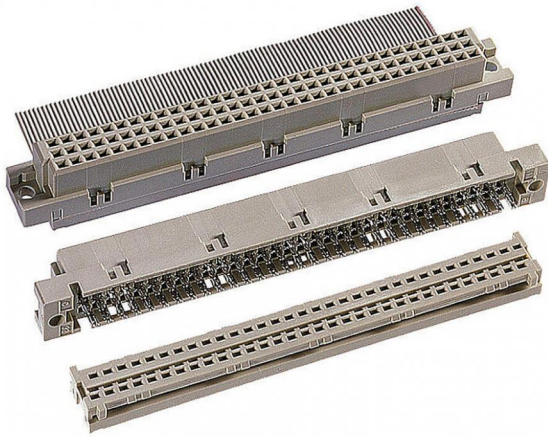

» to product on [www.ept.de](http://www.ept.de)



» to product group DIN 41612

# Product Data Sheet

DIN 41612 IDC, type C,  
Part No. 104-49054



## Technical Specifications

### Basics

Specification	IEC 60603-2 (DIN 41612)
Performance Level	2
No. of Contacts	64
Termination Technology	IDC
Operating Temperature Range	-55°C to +125°C

### Material

Insulator Material	PBT glass filled UL 94 V-0
Contact Material	Copper alloy

### Mechanical

Pitch	2.54 mm
Mating Force	< 60 N
Separating Force per Pin	> 0.15 N
Durability	400 mating cycles

### Electrical

Operational Current	1A @ 20°C
Contact Resistance	<30 mΩ
Insulation Resistance	> 10 <sup>6</sup> MΩ
Test Voltage	500 V

### Approval / Compliance

Environment	RoHS compliant
-------------	----------------


# Product Data Sheet

DIN 41612 IDC, type C,

Part No. 104-49054



## Derating Diagram

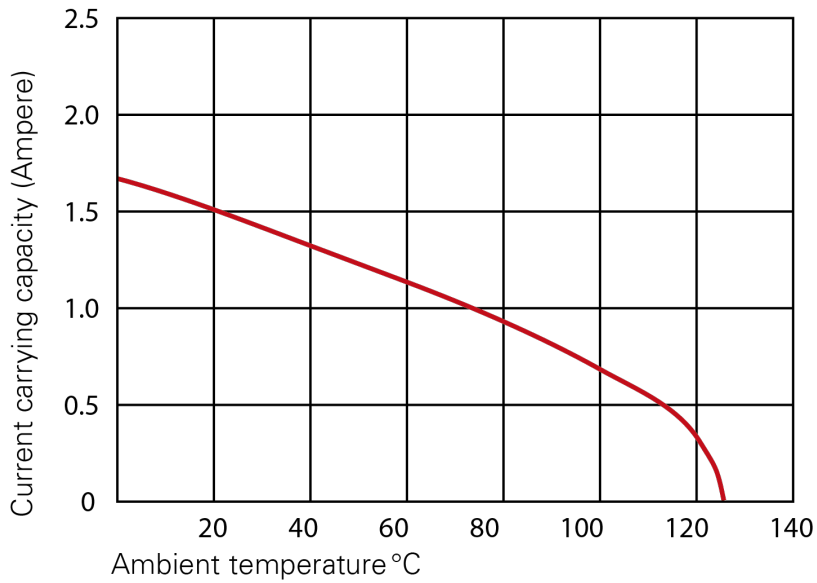

**Type B, Q, C, R**

20 °C 1.5 A

70 °C 1.1 A

100 °C 0.7 A

# Product Data Sheet

DIN 41612 IDC, type C,  
Part No. 104-49054

---



## Drawings

Component data in 2D and 3D format you can download here:

[» PDF](#)

[» 3D IGES](#)

[» 3D STEP](#)

[» 3D PDF](#)